A. Permit Certificate

MUNICIPAL WASTEWATER REUSE PERMIT

LA-000029-02

THE CITY OF ARCO WASTEWATER TREATMENT FACILITY, LOCATED AT 3010 W 2400 N, ARCO, ID 83213 AND IN Township 3N, Range 26E, Section 1, IS HEREBY AUTHORIZED TO CONSTRUCT, INSTALL, AND OPERATE A WASTEWATER REUSE SYSTEM IN ACCORDANCE WITH THE WASTEWATER REUSE RULES (IDAPA 58.01.17) AND THE WASTEWATER RULES (IDAPA 58.01.16), THE GROUND WATER QUALITY RULE (IDAPA 58.01.11), AND ACCOMPANYING PERMIT, APPENDICES, AND REFERENCE DOCUMENTS. THIS PERMIT IS EFFECTIVE FROM THE DATE OF SIGNATURE AND EXPIRES ON (60 months from issue date).

James Johnston, Regional Administrator Idaho Falls Regional Office Idaho Department of Environmental Quality

Issue Date: Draft

DEPARTMENT OF ENVIRONMENTAL QUALITY 900 North Skyline, Suite B Idaho Falls, ID 83402 Phone (208) 258-2650

POSTING ON SITE RECOMMENDED

B. Permit Contents, Appendices, and Reference Documents

| A. Permit Certificate | 1 |
|---|----|
| B. Permit Contents, Appendices, and Reference Documents | 2 |
| C. Abbreviations, Definitions | |
| D. Facility Information | |
| E. Compliance Schedule for Required Activities | 6 |
| F. Permit Limits and Conditions | 7 |
| Buffer Zone Distances | 7 |
| G. Monitoring Requirements Facility Monitoring Table | 9 |
| Facility Monitoring Table | 10 |
| H. Standard Reporting Requirements | 11 |
| I. Standard Permit Conditions: Procedures and Reporting | 12 |
| Emergency 24 Hour Number 1-800-632-8000 | 13 |
| J. Standard Permit Conditions: Modifications, Violation, and Revocation | 14 |
| Appendix 1: Environmental Monitoring Serial Numbers | 15 |
| Soil Monitoring Units | |
| Ground Water Monitoring | 15 |
| Lagoons | 15 |
| Lagoons | 16 |
| | |

Appendices

- 1. Environmental Monitoring Serial Numbers
- 2. Site Maps

References

- 1. Plan of Operation (Operation and Maintenance Manual)
 - Nuisance Odor Management Plan
 - Waste Solids Management Plan

The Sections, Appendices, and Reference Documents listed on this page are all elements of Wastewater Reuse Permit LA-000029-02 and are enforceable as such. This permit does not relieve the City of Arco, hereafter referred to as the permittee, from responsibility for compliance with other applicable federal, state or local laws, rules, standards or ordinances.

C. Abbreviations, Definitions

| Ac-in | Acre-inch. The volume of water or wastewater to cover 1 acre of land to a depth of 1 inch. | | | |
|----------------|---|--|--|--|
| AC-III | Equal to 27,154 gallons. | | | |
| BMP or BMPs | Best Management Practices | | | |
| COD | Chemical Oxygen Demand | | | |
| DEQ or the | Idaho Department of Environmental Quality | | | |
| Department | Tourio Department of Environmental Quanty | | | |
| Director | Director of the Idaho Department of Environmental Quality, or the Directors Designee, i.e. | | | |
| | Regional Administrator | | | |
| ET | Evapotranspiration – Loss of water from the soil and vegetation by evaporation and by plant | | | |
| | uptake (transpiration) | | | |
| GS | Growing Season – Typically April 01 through October 31 (214 days) | | | |
| GW | Ground Water | | | |
| GWQR | IDAPA 58.01.11 "Ground Water Quality Rule" | | | |
| Guidance | Guidance for Reclamation and Reuse of Municipal and Industrial Wastewater, DEQ. | | | |
| HLRgs | Growing Season Hydraulic Loading Rate. Includes any combination of wastewater and | | | |
| | supplemental irrigation water applied to reuse hydraulic management units during the growing | | | |
| | season. The HLRgs limit is specified in Section F <i>Permit Limits and Conditions</i> . | | | |
| HLRngs | Non-Growing Season Hydraulic Loading Rate. Includes any combination of wastewater and | | | |
| | supplemental irrigation water applied to each hydraulic management unit during the non- | | | |
| | growing season. The HLRngs limit is specified in Section F <i>Permit Limits and Conditions</i> . | | | |
| HMU | Hydraulic Management Unit (Serial Number designation is MU) | | | |
| IWR | Irrigation Water Requirement – Any combination of wastewater and supplemental irrigation | | | |
| | water applied at rates commensurate to the moisture requirements of the crop, and calculated | | | |
| | monthly during the growing season (GS). Calculation methodology for the IWR can be found | | | |
| | at the following website: http://www.kimberly.uidaho.edu/water/appndxet/index.shtml . The | | | |
| | equation used to calculate the IWR at this website is: | | | |
| | $IWR = (CU - P_e) / E_i$ | | | |
| | | | | |
| | CU is the monthly consumptive use for a given crop in a given climatic area. CU is | | | |
| | synonymous with crop evapotranspiration | | | |
| | P _e is the effective precipitation. CU minus Pe is synonymous with the net irrigation | | | |
| | requirement (IR) | | | |
| | | | | |
| | E _i is the irrigation system efficiency. To obtain the gross irrigation water requirement | | | |
| | (IWR), divide the IR by the irrigation system efficiency. | | | |
| IDAPA | Idaho Administrative Procedures Act. | | | |
| LG | Lagoon | | | |
| lb/ac-day | Pounds (of constituent) per acre per day | | | |
| MG | Million Gallons (1 MG = 36.827 acre-inches) | | | |
| MGA | Million Gallons Annually (per WLAP Reporting Year) | | | |
| NGS | Non-Growing Season – Typically November 01 through March 31 (151 days) | | | |
| NVDS | Non-Volatile Dissolved Solids (= Total Dissolved Solids less Volatile Dissolved Solids) | | | |
| O&M manual | Operation and Maintenance Manual, also referred to as the Plan of Operation | | | |
| Reuse | The use of reclaimed wastewater for beneficial uses including, but not limited to, land | | | |
| | treatment, irrigation, aquifer recharge, use in surface water features, toilet flushing in | | | |
| | commercial buildings, dust control, and other uses. | | | |
| Reuse | The reporting year begins with the non-growing season and extends through the growing season | | | |
| Reporting Year | | | | |
| | Year was November 01, 1999 through October 31, 2000. | | | |
| SAR | Sodium Absorption Ratio | | | |
| SI | Supplemental Irrigation water applied to the reuse treatment site. | | | |
| Soil AWC | Soil Available Water Holding Capacity - the water storage capability of a soil to a depth at | | | |
| | which plant roots will utilize (typically 60 inches or root limiting layer) | | | |
| SMU | Soil Monitoring Unit (Serial Number designation is SU) | | | |
| | | | | |

| LA-000029-02 | Arco Wastewater Treatment Facility | Draft | Page 3 |
|--------------|------------------------------------|-------|--------|
|--------------|------------------------------------|-------|--------|

| SW | Surface Water | | | |
|--------------|--|--|--|--|
| TDS | Total Dissolved Solids or Total Filterable Residue | | | |
| | | | | |
| TDIS | Total Dissolved Inorganic Solids – The summation of chemical concentration results in mg/L | | | |
| | for the following common ions: calcium, magnesium, potassium, sodium, chloride, sulfate, and | | | |
| | 0.6 times alkalinity (alkalinity expressed as calcium carbonate). Nitrate, Silica and fluoride | | | |
| | shall be included if present in significant quantities (i.e. > 5 mg/L each). | | | |
| TMDL | Total Maximum Daily Load – The sum of the individual waste-load allocations (WLA's) for | | | |
| | point sources, Load Allocations (LA's) for non-point sources, and natural background. Such | | | |
| | load shall be established at a level necessary to implement the applicable water quality | | | |
| | standards with seasonal variations and a margin of safety that takes into account any lack of | | | |
| | knowledge concerning the relationship between effluent limitations and water quality. IDAPA | | | |
| | 58.01.02 Water Quality Standards and Wastewater Treatment Requirements | | | |
| Typical Crop | Typical Crop Uptake is defined as the median constituent crop uptake from the three (3) most | | | |
| Uptake | recent years the crop has been grown. Typical Crop Uptake is determined for each hydraulic | | | |
| | management unit. For new crops having less than three years of on-site crop uptake data, | | | |
| | regional crop yield data and typical nutrient content values, or other values approved by DEQ | | | |
| | may be used. | | | |
| USGS | United States Geological Survey | | | |
| WW | Wastewater applied to the reuse treatment site | | | |

D. Facility Information

| Legal Name of Permittee | City of Arco | |
|-------------------------------------|--|--|
| Type of Wastewater | Municipal | |
| Method of Treatment | Aerated lagoon treatment with chlorine disinfection. Wastewater is slow rate land applied crops during the growing season. | |
| Type of Facility | Publicly owned treatment work (POTW) | |
| Facility Location | One mile south of Arco on US highway 20/26 | |
| Legal Location | Township 3N, Range 26E, Section 1 | |
| County | Butte | |
| USGS Quad | Arco North Quadrangle | |
| Soils on Site | Predominantly Mooretown-Borco, with Mooretown-Borah in lower SW corner. | |
| Depth to Ground Water | 15 to 20 feet during seasonal high ground water; otherwise 30 to 60 feet. | |
| Beneficial Uses of Ground Water | Agriculture, domestic | |
| Nearest Surface Water | Big Lost River; 0.5 miles from site. | |
| Beneficial Uses of Surface Water | Flow has reduced to a few days during spring runoff. | |
| Responsible Official | Ross Langseth, Mayor | |
| Mailing Address | City of Arco | |
| | PO Box 196 | |
| | Arco, ID 83213 | |
| Phone / Fax | Phone (208) 527-8294, fax (208) 527-8951 | |
| Facility Consultants | The Dyer Group, LLC | |
| Mailing Address | 310 N 2 nd East, Suite 153 | |
| | Rexburg, ID 83440 | |
| Phone / Fax | Phone (208) 656-8800, fax (208) 656-8808 | |

E. Compliance Schedule for Required Activities

The Activities in the following table shall be completed on or before the Completion Date unless modified by the Department in writing.

| Compliance Activity Number Completion Date | Compliance Activity Description | |
|---|---|--|
| CA-029-01 December 31, 2008 | A Plan of Operation (Operation and Maintenance Manual or O&M Manual) for the wastewater reuse facilities, incorporating the requirements of this permit, shall be submitted to DEQ for review and comment. The O&M manual shall be designed for use as an operator guide for actual day-to-day operations to meet permit requirements and shall include daily sampling and monitoring requirements to insure proper operation of the wastewater treatment facility. The Plan of Operation shall contain at a minimum all of the information in the latest revision of the Plan of Operation Checklist in the <i>Guidance for Reclamation and Reuse of Municipal and Industrial Wastewater</i> . | |
| | Upon approval, the manual shall be incorporated by reference into this permit and shall be enforceable as a part of this permit. | |
| CA-029-02 Within one year of permit renewal | Submit an Odor Management Plan to DEQ for review and approval. The Odor Management Plan shall include wastewater treatment systems, reuse facilities, and other operations associated with the facility. The plan shall include specific design considerations, operation and maintenance procedures, and management practices to be employed to minimize the potential for or limit odors. The plan shall also include procedures to respond to an odor incident if one occurs, including notification procedures. | |
| CA-029-03 Prior to permit expiration | Perform a seepage test on each lagoon in accordance with the latest DEQ procedure. The maximum leakage rate for each lagoon shall be no more than zero point twenty-five (0.25) inches per day. See IDAPA 58.01.16.493 et seq. If any lagoon is found to be leaking at a rate greater than 0.25 inches per day, the facility, in accordance with a schedule negotiated with and approved by the Director, shall perform one of the following: a. Repair the leak and retest for compliance; b. Re-line the lagoon and re-test for compliance; c. Drain the lagoon in an approved manner and stop using the lagoon; or, Determine the impact of the leaking lagoon on the environment based on ground water sampling and modeling. Any impacts must comply with IDAPA 58.01.11 <i>Ground Water Quality Rule</i> , and IDAPA 58.01.02 <i>Water Quality Standards</i> . If the impact does not comply with 58.01.11 or 58.01.02, the facility shall follow steps a or b, above. | |
| CA-029-04 Within one year of permit renewal | Submit a Waste Solids Management Plan to DEQ for review and approval. The Plan shall describe how waste solids generated at the facility will be handled and disposed of to meet the requirements of Permit Section I.5. | |
| CA-029-05 Within one year of permit renewal | Irrigation schedules for the slow rate application shall be reviewed by a qualified professional and revised as necessary. The recommended irrigation schedule shall be incorporated into the Plan of Operation. | |

| LA-000029-02 | Arco Wastewater Treatment Facility | Draft | Page 6 |
|--------------|------------------------------------|-------|--------|
|--------------|------------------------------------|-------|--------|

F. Permit Limits and Conditions

1) The Permittee is allowed to apply wastewater and treat it on a reuse site as prescribed in the tables below and in accordance with all other applicable permit conditions and schedules.

| | Category Permitted Limits and Conditions | | | |
|---|--|--|--|--|
| | | | | |
| Type of Wastewater | Municipal Wastewater | | | |
| Application Site Area | 65.5 acres | | | |
| Application Season | April 1 to October 31; 214 days | | | |
| Growing Season | April 1 to October 31; 214 days | | | |
| Non-Growing Season | November 1 to March 31 | | | |
| Certified Operator | The facility is a Class I wastewater collection system, a Class I wastewater treatment system, and a wastewater reuse facility. The facility requires an operator licensed in land application, Class I wastewater collection, and Class I wastewater treatment. | | | |
| Reporting Year for Annual Loading Rates | October 16 through October 15 | | | |
| Maximum Hydraulic Loading Rate, Growing Season | Growing Season (GS) Hydraulic Loading Rate shall be substantially equal to the Irrigation Water Requirement (IWR) using data from the tables of the following University Of Idaho web site: http://www.kimberly.uidaho.edu/water/appndxet/index.shtml. IWR is equal to the Mean IR data from these tables divided by the irrigation system efficiency. In lieu of these tables, current climatic and evaporation data, or 30-year average data may be used to calculate the IWR, as defined Section C Abbreviations, Definitions of this permit. Assume no carryover soil moisture and a leaching rate of zero in calculating the IWR. Application shall generally follow consumptive use rates for the crop throughout the season. | | | |
| Maximum Hydraulic Loading Rate, Non- Growing Season | Wastewater disposal is not allowed during the non growing season at this facility. | | | |
| Runoff | The facility shall operate and maintain all runoff control devices as designed in accordance with the Plan of Operation runoff control plan. | | | |
| Ground Water Quality | Ground Water Quality shall be in compliance with <i>Idaho Ground Water Quality Rule</i> IDAPA 58.01.11 | | | |
| Maximum COD Loading | 50 pounds/acre-day seasonal average for growing season. | | | |
| Maximum Nitrogen Loading Rate | Each HMU, 150% of typical crop uptake (see definition), or UI Fertility Guide, from all sources including waste solids and supplemental fertilizers. | | | |
| Maximum Phosphorus | No limit on phosphorus loading. | | | |
| Loading Rate | DEQ reserves the right to re-open this permit for inclusion of phosphorus limits. | | | |
| Construction Plans | Prior to construction or modification of all wastewater facilities associated with the reuse system or expansion, detailed plans and specifications shall be reviewed and approved by DEQ. Within 30 days of completion of construction, the permittee shall submit as-built plans for review and approval. | | | |
| Grazing | Grazing is not allowed at the facility. | | | |
| Allowable crops | Crops grown for human consumption are not allowed. | | | |
| Fencing and Posting | Signs shall be posted every 500 feet designating the fields as wastewater reuse areas or equivalent – see Reuse Guidance. | | | |
| Supplemental Irrigation Water Protection | For systems with wastewater and fresh irrigation water interconnections, DEQ approved backflow prevention devices are required. | | | |
| Odor Management | The wastewater treatment plant, reuse facilities, and other operations associated with the facility shall not create a public health hazard or nuisance conditions, including odors. These facilities shall be managed in accordance with a DEQ approved Odor Management Plan. | | | |

Buffer Zone Distances

| LA-000029-02 | Arco Wastewater Treatment Facility | Draft | Page 7 |
|--------------|------------------------------------|-------|--------|
|--------------|------------------------------------|-------|--------|

| Disinfection | Distance | Distances to | Distance | Distance to | Distance to | Single sample |
|------------------|-----------|--------------|----------|---------------|--------------|----------------|
| Level* | to Public | Inhabited | to | private water | public water | maximum total |
| (total coliform) | Access | Dwellings | streams | sources | sources | coliform level |
| 23/100 ml | 50 feet | 300 feet | 100 feet | 500 | 1000 | |

^{*}The median value of the last five (5) results must not exceed 23 / 100 mL. In addition, no single sample value shall exceed 240 / 100 mL.

G. Monitoring Requirements

- Appropriate analytical methods, as given in the *Guidance for Reclamation and Reuse of Municipal and Industrial Wastewater* or as approved by the Idaho Department of Environmental Quality (hereinafter referred to as DEQ), shall be employed. A description of approved sample collection methods, appropriate analytical methods and companion QA/QC protocol shall be included in the Operation and Maintenance Manual.
- 2) The permittee shall monitor and measure parameters and submit information as stated in the Facility Monitoring Table in this section.
- 3) Samples shall be collected at times and locations that represent typical environmental and process parameters being monitored.
- 4) Monitoring locations are described in Appendix 1. Environmental Monitoring Serial Numbers.
- Monitoring is required at the frequency shown in the table below if wastewater is applied anytime during the time period shown. Unless otherwise agreed in writing by the DEQ, data collected and submitted shall include, but not be limited to, the parameters and frequencies in the Facility Monitoring Table as follows.
- 6) If the soil management unit is less than 15 acres, use 5 sub-samples. If the soil management unit is greater than 15 acres, use 10 sub-samples.
- Three (3) soil samples shall be collected at each sample location, one at 0-12 inches, one at 12-24 inches, and one at 24-36 inches. The soil samples collected at 0-12 inches from each sample location shall be composited. Similarly, all soil samples collected at 12-24 inches shall be composited and all soil samples collected at 24-36 inches shall be composited. This method will yield three samples for analysis, one for 0-12 inches, one for 12-24 inches and one for 24-36 inches for each soil management unit.
- 8) Ground Water Monitoring Procedure: Ground Water Monitoring Wells shall be purged a minimum of three casing volumes and/or until field measurements for pH, specific conductance and temperature meet the following conditions: two successive temperature values measured at least five minutes apart are within one degree Celsius of each other, pH values for two successive measurements measured at least five minutes apart are within 0.2 units of each other, and two successive specific conductance values measured at least five minutes apart are within 10% of each other. This procedure will determine when the wells are suitable for sampling for constituents required by the permit. Other procedures, such as low flow sampling, may be considered by DEQ for approval. The static water level shall be measured prior to pumping or sampling for ground water.
- 9) Annual reporting of monitoring requirements is described in Section H Standard Reporting Requirements.

| LA-000029-02 | Arco Wastewater Treatment Facility | Draft | Page 9 |
|--------------|------------------------------------|-------|--------|
|--------------|------------------------------------|-------|--------|

Facility Monitoring Table

| Frequency | Monitoring Point | Description and Type of Monitoring | Parameters | |
|---------------------------|--|--|---|--|
| Daily | Wastewater to reuse flow meters | Volume of wastewater | Gallons/month and acre*inches/month applied to each HMU; gallons /month to the | |
| | Irrigation flow meter or calibrated pump rate | Volume of supplemental irrigation water | evaporator. | |
| Weekly | Discharge point of wastewater to reuse | grab sample | Total coliform | |
| Monthly | Discharge point of wastewater to reuse | grab sample | pH, nitrate+nitrite nitrogen, total phosphorus, TKN, TDS | |
| Each Harvest | arvest Hydraulic Management Unit | Crop data | 1.Crop type; 2. Crop moisture; 3. Crop harvests per year; 4. Crop yield per harvest in total pounds, and in tons/acre, lb/acre, or bushels/acre. | |
| Lacii Hai vest | | Plant tissue analysis: composite (green) sample of each harvest. | Nitrate-nitrogen, Total Kjeldahl nitrogen, total phosphorus, ash, moisture. | |
| | | Calculate crop nitrogen, phosphorous, and ash removal | lb/acre and total pounds per HMU (dry basis) | |
| | Supplemental irrigation at diversions | Grab sample | TKN, nitrate, nitrite, TDS, pH, total phosphorus | |
| | Hydraulic management unit | Acres used for reuse | Acres | |
| | | Report total nitrogen and phosphorus load from wastewater, fertilizer, and all other non-wastewater application. | Nitrogen and phosphorus applied in lbs/acre*year | |
| Annually | Soil monitoring unit | Composite soil sample | Electrical conductivity, nitrate-N, ammonium-N, pH, plant available phosphorous, chloride, Cation Exchange Capacity | |
| | All flow measurement locations. | Calibration of all flow meters | Document the flow measurement calibration of all flow meters and pumps used directly or indirectly to measure all wastewater. | |
| | Groundwater monitoring wells listed in Appendix 1. | Grab sample of groundwater | Static water level (depth and elevation), nitrate, nitrite, total and dissolved iron, total and dissolved manganese, phosphorus, pH, TDS, total coliform, fecal coliform | |
| First year of permit only | Soil monitoring unit | Composite soil sample | SAR, DTPA-Fe, DTPA-Mn | |

^{1.} Analytical results are required for dissolved iron and / or manganese only if the results for total iron and / or manganese exceed the standards in IDAPA 58.01.11.200.01.b.

| LA-000029-02 | Arco Wastewater Treatment Facility | Draft | Page 10 |
|--------------|------------------------------------|-------|---------|
|--------------|------------------------------------|-------|---------|

H. Standard Reporting Requirements

- 1. The permittee shall submit an Annual Wastewater Reuse Site Performance Report ("Annual Report") prepared by a competent environmental professional no later than January 31 of each year which shall cover the previous year (see Section F for reuse reporting period). The Annual Report shall include results for monitoring required in Section G *Monitoring Requirements*, status of compliance activities, and an interpretive discussion of monitoring data (ground water, vadose zone, hydraulic loading, wastewater etc.) with particular respect to environmental impacts by the facility.
- 2. The annual report shall contain the results of the required monitoring as described in Section G *Monitoring Requirements*. If the permittee monitors any parameter more frequently than required by this permit, the results of this monitoring shall be included in the calculation and reporting of the data submitted in the annual report.
- 3. The annual report shall be submitted to the Engineering Manager in Idaho Falls and the Wastewater Program Manager in Boise.

Greg Eager, P.E. Idaho Falls Regional Office 900 N. Skyline, Suite B Idaho Falls, ID 83402 Phone (208) 528-2650 Richard Huddleston, P.E. Wastewater Program Manager 1410 North Hilton Boise, ID 83706 Phone (208) 373-0561

- 4. Notice of completion of any work described in Section E *Compliance Schedule for Required Activities* shall be submitted to the Department within 30 days of activity completion. The status of all other work described in Section E shall be submitted with the Annual Report.
- 5. All laboratory reports containing the sample results for monitoring required by Section G Monitoring Requirements of this permit shall be submitted with the Annual Report.

| LA-000029-02 | Arco Wastewater Treatment Facility | Draft | Page 11 |
|--------------|------------------------------------|-------|---------|
|--------------|------------------------------------|-------|---------|

I. Standard Permit Conditions: Procedures and Reporting

- 1. The permittee shall at all times properly maintain and operate all structures, systems, and equipment for treatment, operational controls and monitoring, which are installed or used by the permittee to comply with all conditions of the permit or the Wastewater Reuse Permit Regulations, in conformance with a DEQ approved, current Plan of Operations (Operations and Maintenance Manual) which describes in detail the operation, maintenance, and management of the wastewater treatment system. This Plan of Operations shall be updated as necessary to reflect current operations.
- 2. Wastewater(s) or recharge waters applied to the land surface must be restricted to the premises of the application site. Wastewater discharges to surface water that require a permit under the Clean Water Act must be authorized by the U.S. Environmental Protection Agency.
- 3. Wastewater must not create a public health hazard or nuisance condition as stated in IDAPA 58.01.16.600.03. In order to prevent public health hazards and nuisance conditions the permittee shall:
 - a. Apply wastewater as evenly as practicable to the treatment area;
 - b. Prevent organic solids (contained in the wastewater) from accumulating on the ground surface to the point where the solids putrefy or support vectors or insects; and,
 - c. Prevent wastewater from ponding in the fields to the point where the ponded wastewater putrefies or supports vectors or insects.
- 4. The permittee shall:
 - a. Manage the wastewater reuse treatment site as an agronomic operation where vegetative cover is grown and harvested or grazed to utilize the nutrients and minerals in the wastewater, and,
 - b. Not hydraulically overload any particular areas of the wastewater reuse treatment site.
- 5. All waste solids, including dredgings and sludges, shall be utilized or disposed in a manner which will prevent their entry, or the entry of contaminated drainage or leachate therefrom, into the waters of the state such that health hazards and nuisance conditions are not created; and to prevent impacts on designated beneficial uses of the ground water and surface water. The permittee's management of waste solids shall be governed by the terms of the DEQ approved Waste Solids Management Plan, which upon approval shall be an enforceable portion of this permit.
- 6. If the permittee intends to continue operation of the permitted facility after the expiration of an existing permit, the permittee shall apply for a new permit at least six months prior to the expiration date of the existing permit in accordance with the Wastewater Reuse Permit Regulations and include seepage tests on all lagoons per latest DEQ procedures.
- 7. The permittee shall allow the Director of the Idaho Department of Environmental Quality or the Director's designee (hereinafter referred to as Director), consistent with Title 39, Chapter 1, Idaho Code, to:
 - a. enter the permitted facility;
 - b. inspect any records that must be kept under the conditions of the permit;
 - c. inspect any facility, equipment, practice, or operation permitted or required by the permit; and,
 - d. sample or monitor for the purpose of assuring permit compliance, any substance or any parameter at the facility.

| LA-000029-02 | Arco Wastewater Treatment Facility | Draft | Page 12 |
|--------------|------------------------------------|-------|---------|
|--------------|------------------------------------|-------|---------|

- 8. The permittee shall report to the Director under the circumstances and in the manner specified in this section:
 - a. In writing thirty (30) days before any planned physical alteration or addition to the permitted facility or activity if that alteration or addition would result in any significant change in information that was submitted during the permit application process.
 - b. In writing thirty (30) days before any anticipated change which would result in non-compliance with any permit condition or these regulations.
 - c. Orally within twenty-four (24) hours from the time the permittee became aware of any non-compliance which may endanger the public health or the environment at telephone numbers provided in the permit by the Director:

DEQ Idaho Falls Regional Office: (208) 528-2650 Emergency 24 Hour Number 1-800-632-8000

- d. In writing as soon as possible but within five (5) days of the date the permittee knows or should know of any non-compliance unless extended by the DEQ. This report shall contain:
 - i. A description of the non-compliance and its cause;
 - ii. The period of non-compliance including to the extent possible, times and dates and, if the non-compliance has not been corrected, the anticipated time it is expected to continue; and,
 - iii. Steps taken or planned to reduce or eliminate reoccurrence of the non-compliance.
- e. In writing as soon as possible after the permittee becomes aware of relevant facts not submitted or incorrect information submitted, in a permit application or any report to the Director. Those facts or the correct information shall be included as a part of this report.
- 9. The permittee shall take all necessary actions to prevent or eliminate any adverse impact on the public health or the environment resulting from permit noncompliance.
- 10. The permittee shall determine (on an on-going basis) if any noxious weed problems relate to the permitted sites. If problems are present, coordinate with the Idaho Department of Agriculture or the local county authority regarding their requirements for noxious weed control. Also address these control operations in an update to the Operations and Maintenance Manual.

J. Standard Permit Conditions: Modifications, Violation, and Revocation

- 1. The permittee shall furnish to the Director within reasonable time, any information including copies of records, which may be requested by the Director to determine whether cause exists for modifying, revoking, reissuing, or terminating the permit, or to determine compliance with the permit or these regulations.
- 2. Both minor and major modifications may be made to this permit as stated in IDAPA 58.01.17.700.01 and .02 with respect to any conditions stated in this permit upon review and approval of the DEQ.
- 3. Whenever a facility expansion, production increase or process modification is anticipated which will result in a change in the character of pollutants to be discharged or which will result in a new or increased discharge that will exceed the conditions of this permit, or if it is determined by the DEQ that the terms or conditions of the permit must be modified in order to adequately protect the public health or environment, a request for either major or minor modifications must be submitted together with the reports described in Section I *Standard Reporting Requirements*, and plans and specifications for the proposed changes. No such facility expansion, production increase or process modification shall be made until plans have been reviewed and approved by the DEQ and a new permit or permit modification has been issued.
- 4. Permits shall be transferable to a new owner or operator provided that the permittee notifies the Director by requesting a minor modification of the permit before the date of transfer.
- 5. Any person violating any provision of the Waste Water Reuse Permit Regulations, or any permit or order issued thereunder shall be liable for a civil penalty not to exceed ten thousand dollars (\$10,000) or one thousand dollars (\$1,000) for each day of a continuing violation, whichever is greater. In addition, pursuant to Title 39, Chapter 1, Idaho Code, any willful or negligent violation may constitute a misdemeanor.
- 6. The Director may revoke a permit if the permittee violates any permit condition or the Wastewater Reuse Permit Regulations.
- 7. Except in cases of emergency, the Director shall issue a written notice of intent to revoke to the permittee prior to final revocation. Revocation shall become final within thirty-five (35) days of receipt of the notice by the permittee, unless within that time the permittee request an administrative hearing in writing to the Board of the Department of Environmental Quality pursuant to the Rules of Administrative Procedures contained in IDAPA 58.01.23.
- 8. If, pursuant to Idaho Code 3 67-5247, the Director finds the public health, safety or welfare requires emergency action, the Director shall incorporate findings in support of such action in a written notice of emergency revocation issued to the permittee. Emergency revocation shall be effective upon receipt by the permittee. Thereafter, if requested by the permittee in writing, a revocation hearing before the Board of the Department of Environmental Quality shall be provided. Such hearings shall be conducted in accordance with the Rules of Administrative Procedures contained in IDAPA 58.01.23.
- 9. The provisions of this permit are severable and if a provision or its application is declared invalid or unenforceable for any reason, that declaration will not affect the validity or enforceability of the remaining provisions.
- 10. The permittee shall notify the DEQ at least six (6) months prior to permanently removing any permitted reuse facility from service, including any treatment, storage, or other facilities or equipment associated with the reuse site. Prior to commencing closure activities, the permittee shall:
 - a) participate in a pre-site closure meeting with the DEQ;
 - b) develop a site closure plan that identifies specific closure, site characterization, or cleanup tasks with scheduled task completion dates in accordance with agreements made at the pre-site closure meeting; and,
 - c) submit the completed site closure plan to the DEQ for review and approval within forty-five (45) days of the pre-site closure meeting. The permittee must complete the DEQ approved site closure plan.

| LA-000029-02 | Arco Wastewater Treatment Facility | Draft | Page 14 |
|--------------|------------------------------------|-------|---------|
|--------------|------------------------------------|-------|---------|

Appendix 1: Environmental Monitoring Serial Numbers

Hydraulic Management Units

| Serial Number | Description | Acres |
|---------------|------------------------|-------|
| MU-0029-1 | Pivot No. 1; northwest | 12.1 |
| MU-0029-2 | Pivot No. 2; southwest | 31.4 |
| MU-0029-3 | Pivot No. 3; east | 22.0 |

Wastewater Sampling Points

| Serial Number | Description |
|---------------|--|
| WW-0029-1 | Wastewater inflow to facility |
| WW-0029-2 | Post chlorination effluent to irrigation |

Soil Monitoring Units

| Serial Number | Description | Associated MU |
|---------------|---------------|---------------|
| SU-0029-1 | Pivot 1 field | MU-0029-1 |
| SU-0029-2 | Pivot 2 field | MU-0029-2 |
| SU-0029-3 | Pivot 3 field | MU-0029-3 |


Ground Water Monitoring

| Serial Number | Description | Location |
|---------------|---------------------------------|-------------------|
| GW-0029-1 | Well 1; NW well on site. | NW of Pivot 1 |
| GW-0029-2 | Well 2; W well on site. | W of Pivots 1 & 2 |
| GW-0029-3 | Well 3; SW well on site. | SW of Pivot 2 |
| GW-0029-4 | Well 4; S central well on site. | |
| GW-0029-5 | Well 5; SE well on site. | SE of Pivot 3 |
| GW-0029-6 | Well 6; NE well on site. | NE of Pivot 3 |

Lagoons

| Serial Number | Description |
|---------------|-------------------------------|
| LG-0029-1 | Lagoon no. 1; west lagoon. |
| LG-0029-2 | Lagoon no. 2; central lagoon. |
| LG-0029-3 | Lagoon no. 2; east lagoon. |

Appendix 2: Site Maps Site Map No. 1

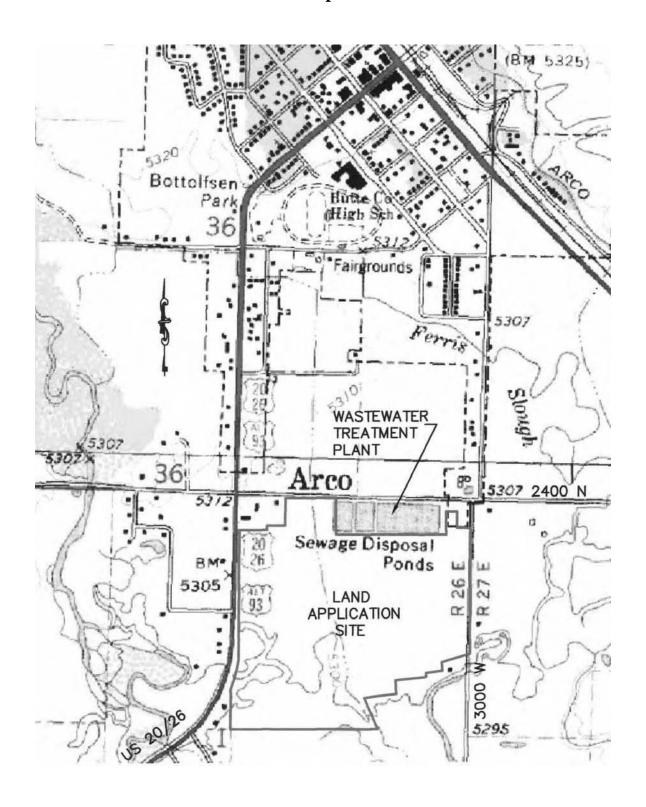

Site Map No. 2

